

OlenBox series X
















VERY HIGH AUTONOMY WITH SLOW DISCHARGE


TECHNICAL SHEET

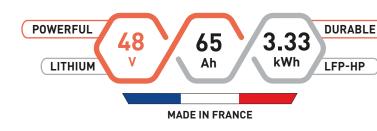


ULTRA COMPACTE



DIMENSIONS





MADE IN FRANCE INNOVATION

- High Performance Lithium LFP Technology
- Reliable energy source
- 60% lighter than a lead acid battery
- Designed to last 20 years
- Charge efficiency close to 100%
- **Built-in safety mechanisms**
- From 4,000 to 12,000 cycles (refer to curves)
- No « memory effect »

APPLICATIONS



Lighting & Instrumentation

Test & Measurement, Camera, Lighting, Energy case, Weather station, Pumping...



Marine, mobility and robotics Boats, Recreational vehicles,

Robots, Construction, Forklifts...



Critical power supply

UPS, Datacenter, Medical infrastructures...



Solar storage

Self-consumption, Renewable energies, Vehicle to grid, Grid services...

SPECIFICATIONS

Discharge temperature


Storage temperature

Electrical		Mechanical	
Rated voltage	52.0 V	Casing material	ABS
Rated capacity	64.0 Ah	Dimensions (W*D*H)	485*170*240 mm
Energy	3.33 kWh	Weight	27.00 kg
Internal resistance	< 53.0 mΩ	Terminals	M8
Monthly self discharge	< 3 %	Ingress protection code	IP65
Charge		Discharge	
Charge efficiency	> 99%	Discharge efficiency	> 98%
Charge voltage	58.0 ± 0.1 V	Continuous current	10 A
Charge mode	CC/CV	Maximum current 10 sec.	30 A
Rated charge current	10.0 A	Discharge cut-off voltage	40.0 V
Charge cut-off current	0.05C	Configurable thresholds	No
Lead-acid chargers	Compatible	Exceeding values	No
Temperature		Quality	
Charge temperature	0°C +50°C	Certifications	CE, RoHS, UN38.3

-20°C I +65°C Warranty

+15°C | +35°C | Manufacturing country

Cluster your batteries, add a screen and join the MERLIN IoT ecosystem!

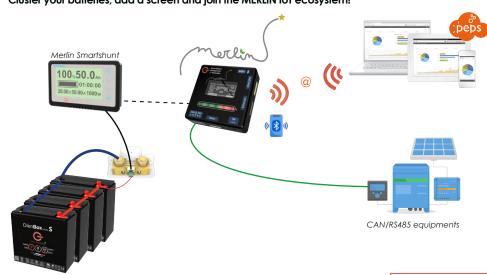

2 years

France

















UL STD 1642













- 4,000 cycles @80% DoD @80% SoH
- 8,000 cycles @70% DoD @70% SoH
- √ 12,000 cycles @60% DoD @80% SoH



Colenereies



Longest service life on the market

Our systems are designed to last up to 20 years providing the lowest Total Cost of Ownership (TCO).



Eco-friendly

Circular Economy product.

Recyclable battery containing neither lead nor cobalt.



100% secure

LFP-HP chemistry is intrinsically safe and the BMS protect the battery. No risk of fire or deflagration.



Replaces 2 lead-acid batteries

Olenergies LFP-HP batteries can be discharged at 100% of useful capacity (lead-acid = 50%)!



Charge efficiency close to 100%

There is no need to follow a sequential curve. Charging efficiency is close to 100%.




Equal voltage throughout the discharge


Unlike a lead-acid battery, our technology provide the same voltage levels throughout the discharge process.



State of Health (SoH) related to the number of cycles for different Depths of Discharge (DoD) @C/5 and 25°C

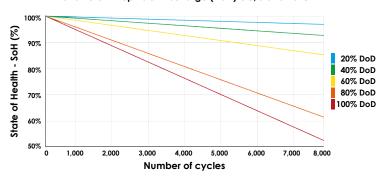


State of Health (SoH) related to the number of cycles for different temperatures @C/5 and 100% DoD

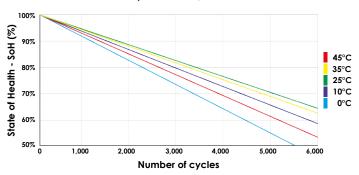


DISCHARGE CURVES


Voltage curves @25°C for various discharge currents

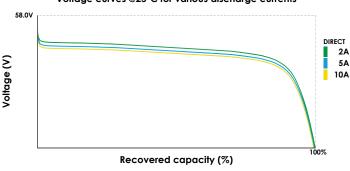

Voltage curves @C/5 for various temperatures

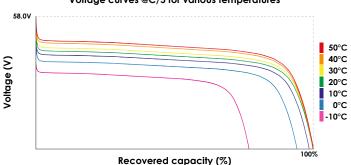

CHARGE CURVE

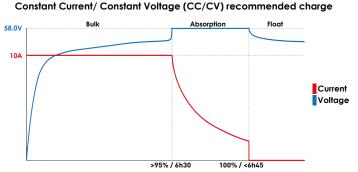

Load over time (hours)

SELF-DISCHARGE CURVE

Self-discharge according to time and storage temperature

